




Z Cages



Product Information

Our NEW improved Neumann Steel Z-Cages are ideal for footings in most residential slabs and many commercial projects.

The class "N" bar cages come in 6m lengths with more Z's per cage providing additional support and applications beyond the industry norm. See the table provided to find the right cage for you.

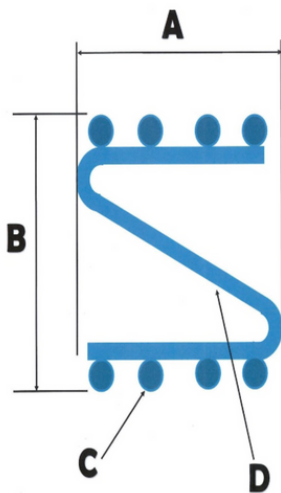

Product Code	Width (A)	Height (B)	Longitudinal (C)	Fitments (D)	Substitute for	Nominal 6m Weight
NZ1222	200 mm	200 mm	2x N12 Top & Btm	10x R10 @ 600crs	-	26.18 kg
NZ1233	200 mm	300 mm	3x N12 Top & Btm	10x R10 @ 600crs	L12TM3 Top & Btm	37.57 kg
NZ1234	200 mm	400 mm	3x N12 Top & Btm	10x R10 @ 600crs	L12TM3 Top & Btm	38.11 kg
NZ1235	200 mm	500 mm	3x N12 Top & Btm	10x R10 @ 600crs	L12TM3 Top & Btm	38.66 kg
NZ1242	300 mm	200 mm	4x N12 Top & Btm	10x R10 @ 600crs	L12TM4 Top & Btm	50.11 kg
NZ1243	300 mm	300 mm	4x N12 Top & Btm	10x R10 @ 600crs	L12TM4 Top & Btm	50.37 kg
NZ1244	300 mm	400 mm	4x N12 Top & Btm	10x R10 @ 600crs	L12TM4 Top & Btm	50.78 kg

Compliant with:

- AS/NZS 4671: 2019 Steel reinforcing materials
- AS 1554.3.2014_Amdt1-2017 Welding of reinforcing steel
- AS 2870:2011 Residential slabs & footings - construction